

Serie F

FRANTUMATORE SECONDARIO


SECONDARY PULVERIZER

BROYEUR HYDRAULIQUE


DEMOLEDOR SECUNDARIO

STARRE PULVERISIERER

GARRA PULVERIZADORA FIXAS

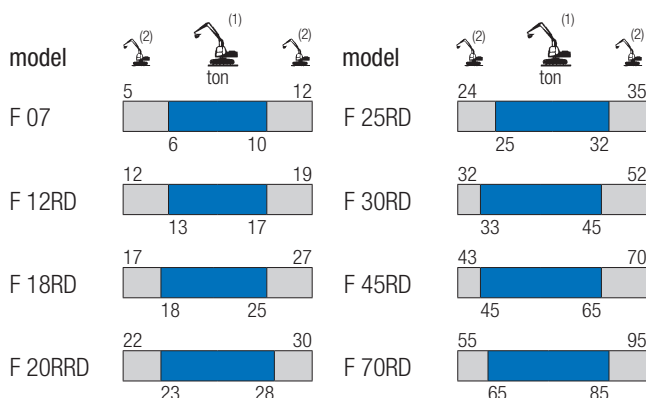

- (1) Accoppiamento escavatore-attrezzatura ottimale / Optimum excavator-equipment combination
Couplage pelle-équipement optimale / Acoplamiento excavadora-implimento optimal
Optimale Bagger-Ausrüstung Kombination / Combinação máquina-implimento ideal
- (2) Accoppiamento escavatore-attrezzatura possibile / Possible excavator-equipment combination
Couplage pelle-équipement possible / Acoplamiento excavadora-implimento possible
Mögliche Bagger-Ausrüstung Kombination / Combinação máquina-implimento possível

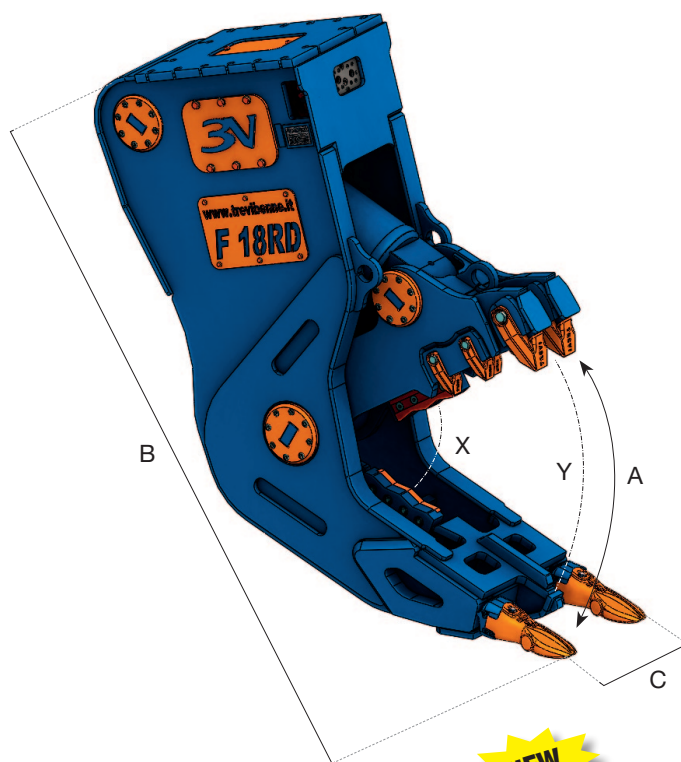

NEW



		F 07	F 12RD*	F 18RD*	F 20RRD*	F 25RD*	F 30RD*	F 45RD*	F 70RD*
kg	kg.	550	1190	1990	2405	2650	3070	4490	6430
A	mm.	475	690	825	825	870	950	1130	1250
B	mm.	1330	1740	1845	2215	1955	2100	2415	2670
C	mm.	330	420	540	540	670	720	760	800
	mm.	140	220	260	260	260	260	260	325
X	t.	70	150	205	205	240	275	370	415
Y	t.	25	65	85	85	100	105	125	170
∅ max	mm.	20	30	40	40	45	50	60	75
	bar	250	310	310	310	310	310	340	340
	l/min.	40 / 60	120 / 200	200 / 300	200 / 300	250 / 350	300 / 400	350 / 450	450 / 600
	bar	/	/	/	140	/	/	/	/
	l/min.	/	/	/	10	/	/	/	/

(*) Modello disponibile con denti intercambiabili imbullonati / (*) Bolted interchangeable teeth version available
 (*) Modèle disponible avec dents boulonnées interchangeables / (*) Modelo equipado con dientes intercambiables atornillados
 (*) Model mit verschraubten Wechselzähnen / (*) Modelo disponível com dentes intercambiáveis aparafusados